

P roduct Introduction

GPT2451 智能无

4G

USB

/ /

6年 (1小 1次) 以上。自主



F eatures

- 4G
- LCD
-
-
-
- PC和移
- IP67防


A pplication

4G

S pecifications

| | |
|--|-----------------------------|
| | -100kpa~0kPa~20kPa...100MPa |
| | 3.6V,19AH) |
| | 1小 6年 |
| | 可配 2min-1440min 注意: |
| | 80uA, 150mA |
| | ±0.5%FS |
| | NB-IOT、4G可 |
| | USB配置操作、服 |
| | 0.015%FS/°C |
| | -30°C~70°C |
| | 按 |
| | 0%~95% |
| | 316L, |
| | 1.5倍 |
| | IP67 |

D imension

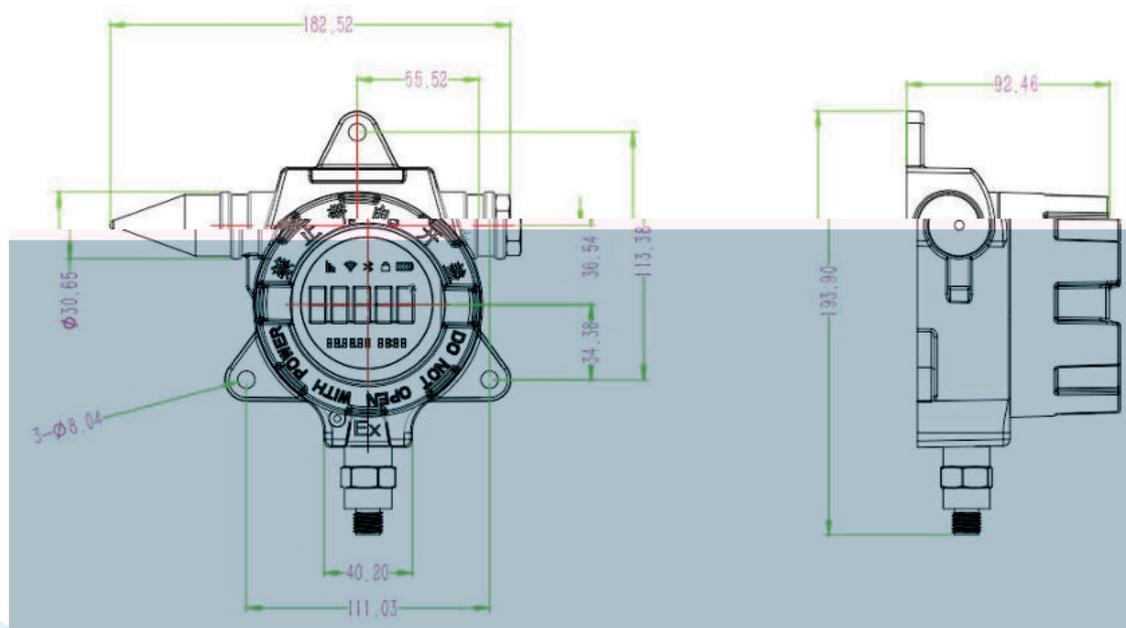



| | | | | | | | | |
|---------|---------|-----------------------------|---|---|----|----|----|--|
| GPT2451 | | | | | | | | |
| GPT2451 | 0/X | -100kpa~0kPa~20kPa...100MPa | | | | | | |
| | G | | | | | | | |
| | S | | | | | | | |
| | A | | | | | | | |
| | B | | | | | | | |
| | D1 | | | | | | | |
| | C1 | M20×1.5 外螺 | | | | | | |
| | C2 | G1/2 外螺 | | | | | | |
| | C3 | | | | | | | |
| | B1 | | | | | | | |
| | C1 | SIM | | | | | | |
| | C2 | SIM | | | | | | |
| | GPT2451 | 0/1m | G | B | C2 | B1 | C1 | |

1
2